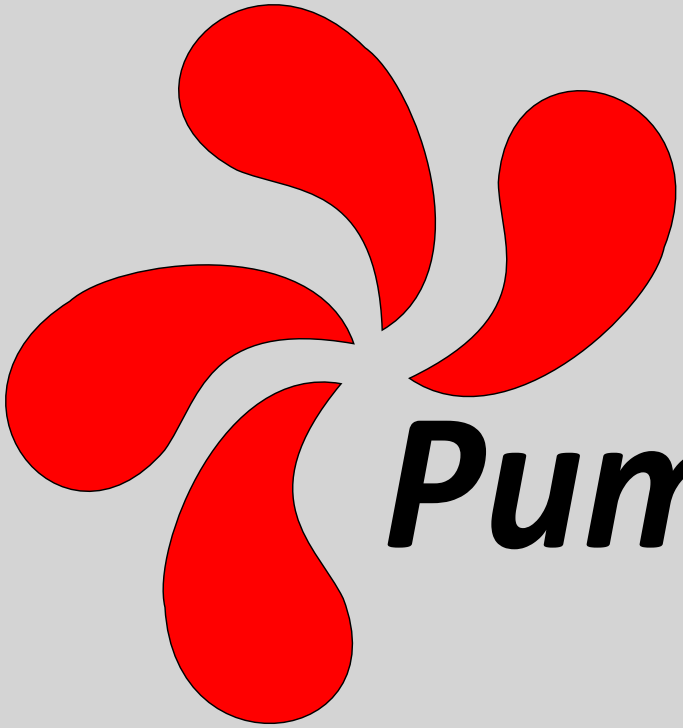

Pumps2go

Pumps2go Ltd, Units 5-6 Grain Warehouse, Derby Street, Burton-on-trent, DE14 2JJ

+44 (0)1283 512513 info@pumps2go.co.uk www.pumps2go.co.uk

CONTENTS

Mini Flowatch 2	1
Mini Flowatch Comfort	2
Maxi Eco Flowatch	3
Flowatch Design	4
Flowatch Vision	5
Centifugal Pump CP08	6
Flowta Evo	7
Eco Tank+ 1.2 / 2.5	8
Sunny Flowatch Duo	9
1.8L Tank Pump	10
1.8L High Lift Tank Pump	11
Dairy Cabinet Pump	12
Braided Hose	13

Pumps2go

Mini FLOWATCH® 2

Mini solenoid pump reliable and silent for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LC440

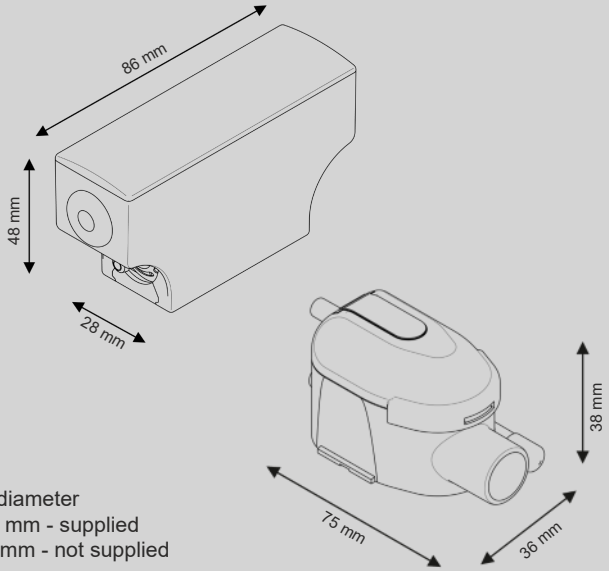

Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied

Technical Specification

Flowrate Max	15L/hr
Suction Head Max	2m
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IP64
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	1.6m
Dimensions	86x28x48mm / 75x36x38mm

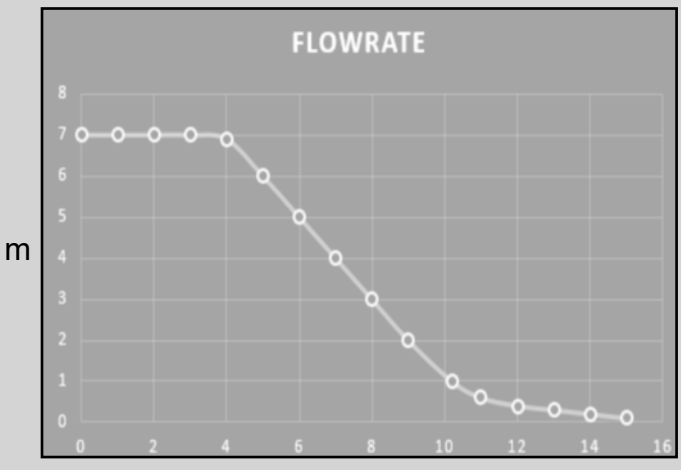

Benefits

Very Silent
Very silent pump (20.2 dBA), suitable for an

IP64 Protection
Protected against water splashes and

Quick Connectors
Make installation and maintenance

Clear Reservoir
Facilitates maintenance thanks to a quick

Brass Outlet
More solid and reliable than plastic

Accessories Included
All accessories required for installation are

Contents
Pump - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Double-side adhesive - Inlet tube - Suction tube 1.8m - 1 clamp

Mini FLOWATCH® 2 COMFORT

The best mini pump on the market in a quieter and easy-to-install version, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCD750

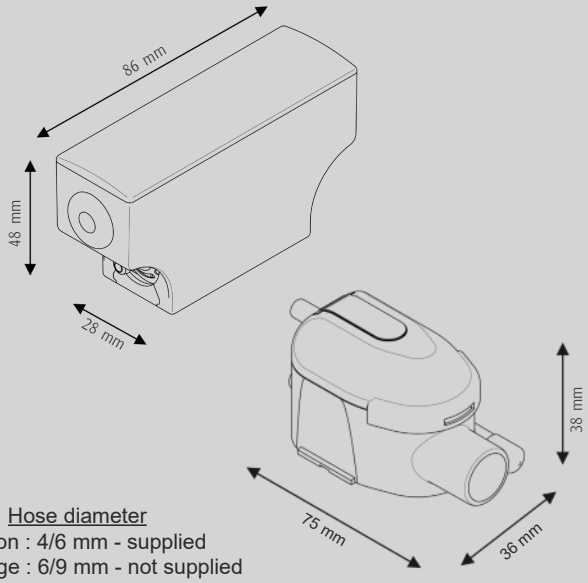

Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied

Technical Specification

Flowrate Max	15L/hr
Suction Head Max	2m
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IP64
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	1.6m
Dimensions	86x28x48mm / 75x36x38mm

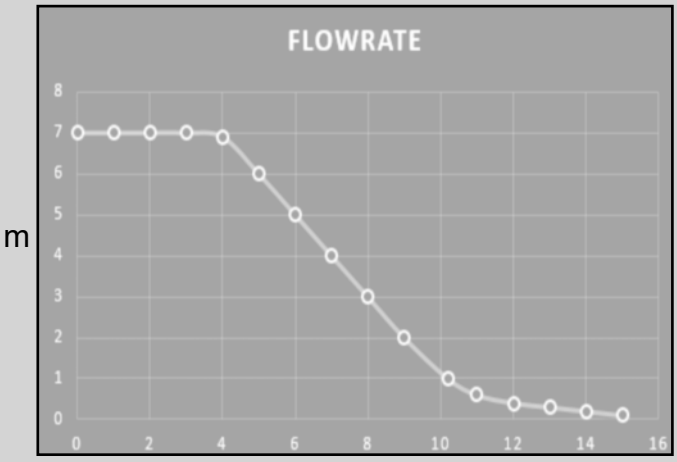

Benefits



New Casing Comfort

The new Comfort casing is composed of a custom-made patented foam.

It dampens pump vibrations and reduces the perceived noise level.

Reliability Proven

The mini FLOWATCH® 2, included, is a reliable and durable pump sold in more than 35 countries.

Very Silent

Thanks to its casing, the pump is extremely quiet



Pump Stand Included

Make pump installation and maintenance

Stop Siphoning Included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

Quick Connectors

Make installation and maintenance

IP64 Protection

Protected against water splashes and

Contents

Pump - Reservoir with air-vent tube - Power / alarm cable - Comfort casing
- Pump stand -Reservoir stand -
Stop Siphoning - Double-sided adhesive - Inlet tube - Suction tube

Maxi Eco FLOWATCH®

Maxi solenoid pump, compact and powerful, for the condensate removal of air conditioners up to 30kW / 100 000BTU

Ref: DE04LCC300

Technical Specification

Flowrate max	40 l/h
Suction head max	2 m
Discharge head	10 m
Electrical power	16 W
Voltage	220-240 V - 50 / 60 Hz
Alarm	No alarm
Noise level	
Protection rating	IP20
Thermal protection	Yes
Operating cycle	100%

Benefits

Silent

The only pump of the world to offer such a flowrate with such a low noise.

High Efficency

Flowrate 40 l/h

Discharge head 10 mur de refoulement 10 m.

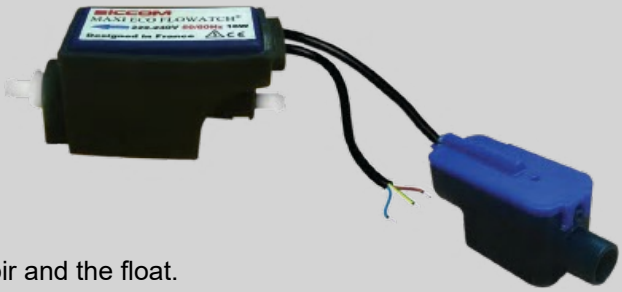

Removable Reservoir

Can be easily unclipped in order to clean the reservoir and the float.

Intergrated Filter

Plastic filter integrated to the reservoir.

It prevents big impurities to damage the pump.

Accessories Included

All necessary accessories are included in the box.

FLOWATCH DESIGN®

Complete kit, in-duct pump, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCF300

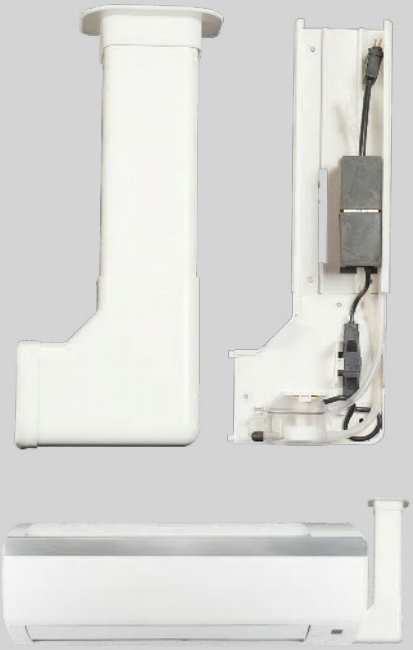

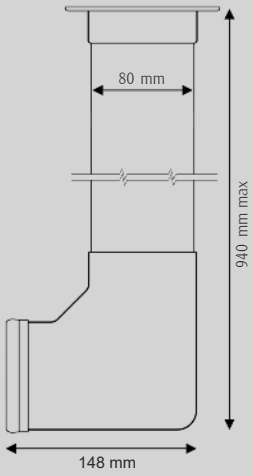

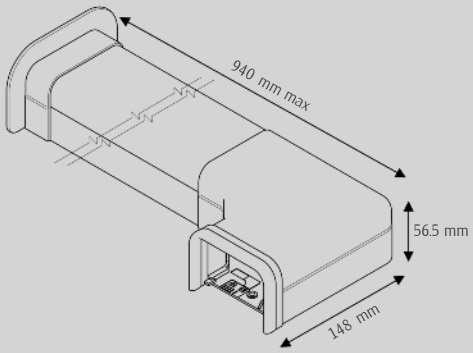

Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied

Technical Specification

Flowrate Max	15L/hr
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IP64
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	1.6m
Trunking Dimensions only	800x80x55mm

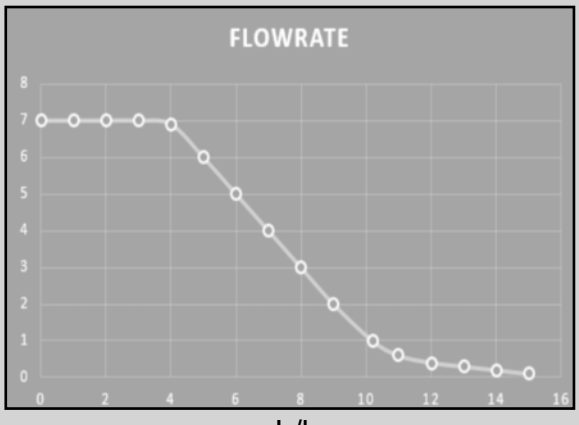

Benefits

Mini Flowatch 2 included
It assures a high reliability and an easy maintenance.

Very Silent
Very silent pump (20.2 dBA), suitable for an installation in any room.

IP64 Protection
Protected against water splashes and dust.

Stop Siphoning Included
Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

Nice Design
Thanks to its shape and its finishing accessories
(included), FLOWATCH® DESIGN offers great

Kit Pre-Assembled
Pump is already installed in its duct. Installation is easy and quick.

Recommended Accessory

Ref- GC1KCTC710

Connection extension kit

The Connection Extension Kit allows you to move the condensate pump from the trunking and into the ceiling above.

FLOWATCH® VISION

The only monoblock wall pump on the market, installed horizontally or vertically, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCF300

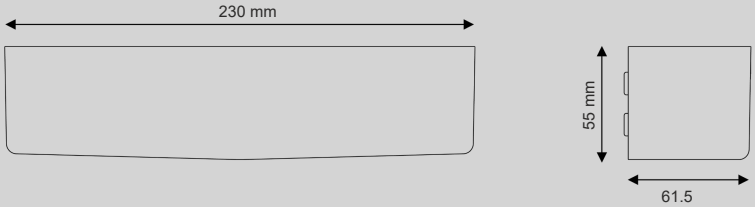

Hose diameter
Discharge : 6/9 mm - not supplied

Technical Specification

Flowrate Max	15L/hr
Discharge Head	10m
Electrical Power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise Level	
Protection Rating	IPX3
Thermal Protection	Yes
Operating Cycle	100%
Power/Alarm Cable	1.4m
Trunking Dimensions only	230x61.5x55mm

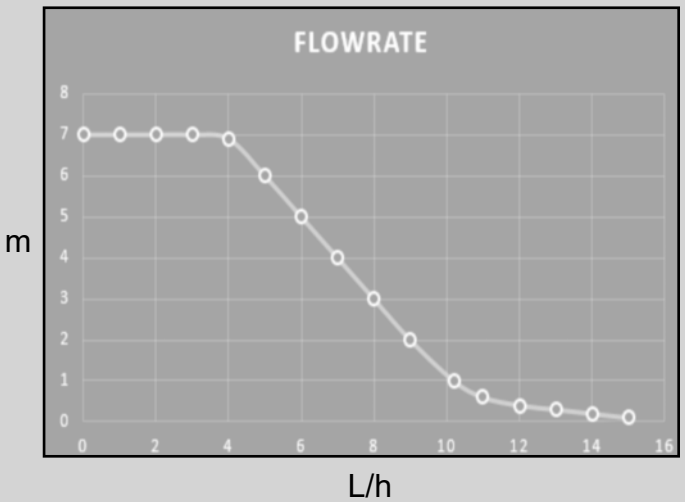

Benefits

4 Possible Installations

World first - Can be installed horizontally or vertically, on the right or on the left of the air conditioner.

Easy Maintenance

Access to the pump elements (reservoir, tubes
etc.) is made by removing the cover.

Very Silent

Very silent pump, suitable for an installation in any room.

Record Size

Thanks to its small size, the FLOWATCH® VISION is the most discreet and aesthetic monoblock wall pump of the market.



Reservoir With Removing Filter

Prevents dust and particles to damage the pump.
Easy to clean.

Centrifugal Pump CP08

Universal centrifugal pump dedicated to split cassettes.

Ref: CP08SC6641

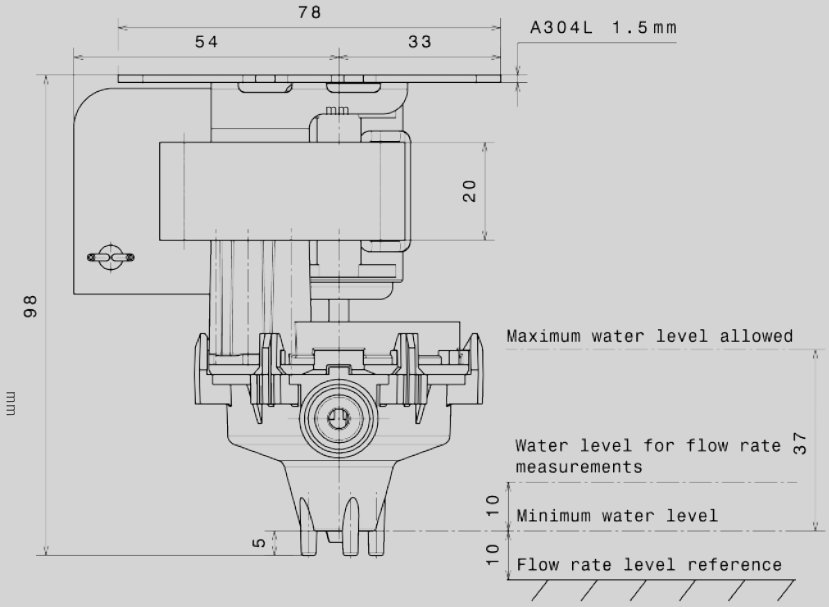

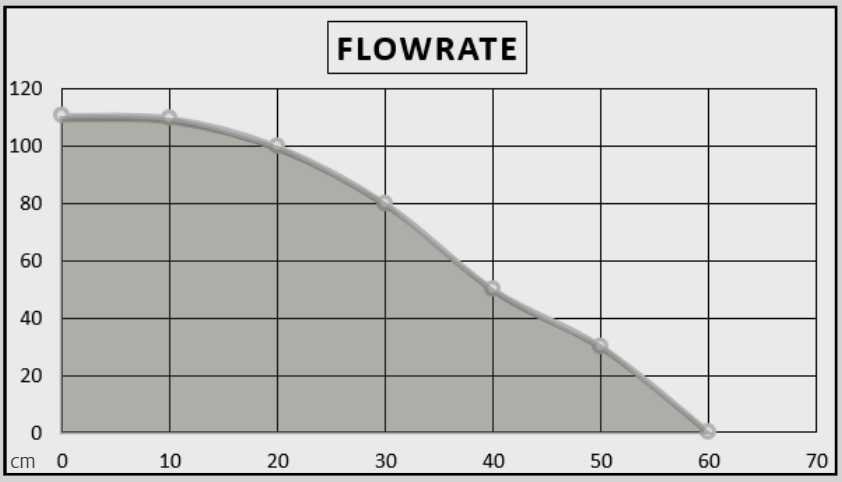

Technical Specification

Flowrate Max	60L/hr
Discharge Head	110cm
Electrical Power	8W
Voltage	220-240V 50/60Hz
Noise Level	
Protection Rating	IP54
Temperature Rise	66K
Operating Cycle	100%
Outlet Tube	OD 14mm
Dimensions	82.5x76x97.3mm

Universal Plate

The CP08 mounting plate has been designed to fit the majority of cassette air conditioners on the market.

FLOWLTA EVO

Wall-mounted monobloc pump, dismountable, for the condensate removal from air conditioners up to 10kW / 36000BTU.

Ref: DE05LCC440

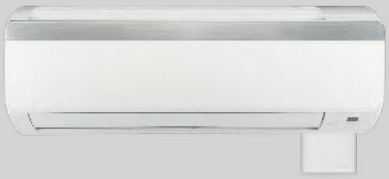

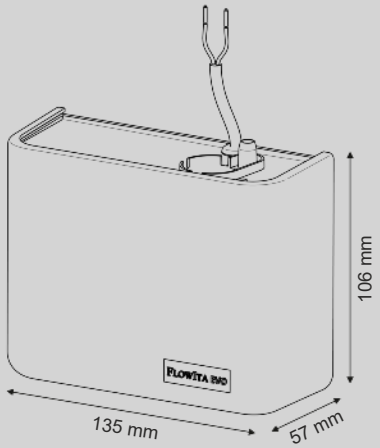

Hose diameter
Discharge : 6/9 mm - not supplied

Technical Specification

Flowrate max	13.2 l/h
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm*	Optional
Noise level**	
Protection rating	IP24
Thermal protection	Yes
Operating cycle***	100%
Power cable	0.8 m
Tank capacity	170 ml
Dimensions	135 x 57 x 106.5 mm

* Alarm option available on request. ** Notation from 1 wave (20 dBA) to 6 waves (> 45 dBA)
*** The pump is able to run 100% of the time if necessary.

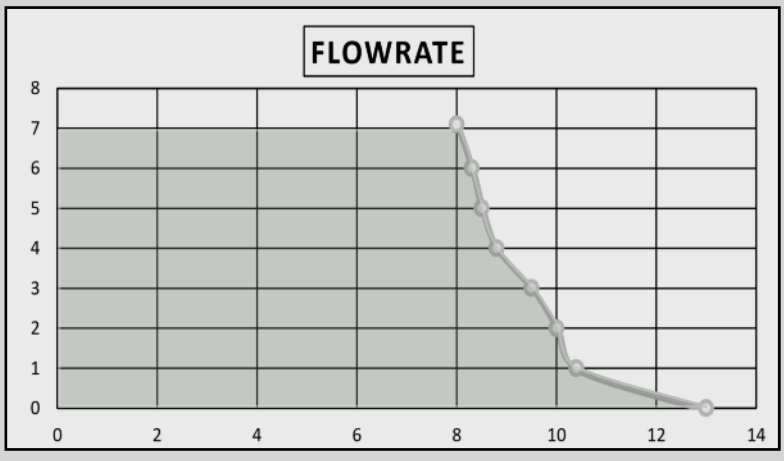

Benefits



Dismountable

The FLOWITA EVO can be disassembled in seconds!

Front panel, tank, suction tube... all the elements are removable.

Installation and maintenance has never been so quick and easy!

100ml Pumping Cycles

Its large reservoir allows the pump to operate optimally: larger and less frequent pumping cycles.

Extremely Silent

The most discreet wall-mounted pump on the market!

Quick Installation

The FLOWITA EVO can be installed easily and quickly underneath any air conditioner.

IP64 Protection

Protected against water splashes.

ECOTANK+ 1.2 / 2.5

Centrifugal tank pump for the removal of condensates
from air conditioners, refrigerated displays or gas condensing boilers.

Ref ECOTANK+ 1.2 50Hz: DE12QCC610
Ref ECOTANK+ 2.5 50Hz: DE25QCC620

pH > 2.5

Technical Specification

Flowrate max	800 l/h
Discharge head	5.6 m
pH tolerated	pH > 2.5
Condensates max temp.	60°C
Electrical power	65W
Voltage	230V 50Hz
Alarm	NO-NC
Noise leve	
Protection rating	IP24
Thermal protection	Yes
Operating cycle	30%
Cable length	1.5 m
Dimensions ECOTANK+ 1.2	280x130x129mm
Dimensions ECOTANK+ 2.5	280x130x159mm

FLOWRATE

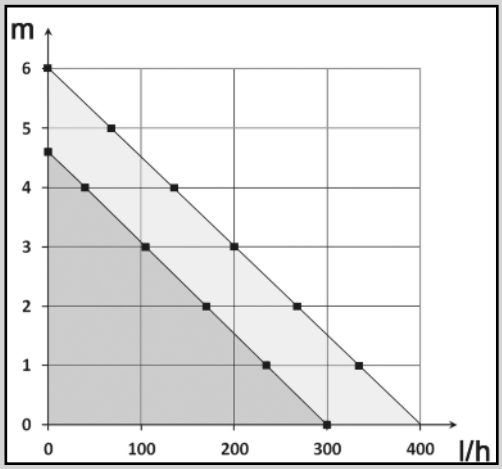

Benefits

IP64 Protection
The pump is protected against water splashes.

Universal Electric Plug
Power/alarm cable can be taken off, making easy installation and maintenance.

Outlet for 6/9 or 9/12mm tube
Thanks to its connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.

High Capacity Tank
Thanks to its 2.5 l tank, the ECOTANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.

Compact Tank Pump
With only 129mm height, the ECOTANK+ 1.2 fits easily in any space.

Reversible Tank
Turning the tank allows to fit in any configuration.

PVC Clear Tube Included (Only in 60HZ version)
A 6m discharge tube (10x13mm diameter) is included in the ECOTANK+ 2.5 60Hz version.

SUNNY FLOWATCH®

Mini tank pump (solenoid) for the condensate removal of gas condensing Boilers up to 60Kw/20D 000BTU

Ref: DE05NCC090

Technical Specification

Flowrate max	19 l/h
Discharge head	10 m
pH tolerated	pH > 2.5
Electrical power	19 W
Voltage	220-240 V - 50/60Hz
Alarm	NO-NF
Noise level	20.2dBA
Protection rating	IPX4
Thermal protection	OUI
Operating cycle	100%
Power / alarm cable	1.5 m / 1.3 m
Dimensions	186 x 110 x 100 mm

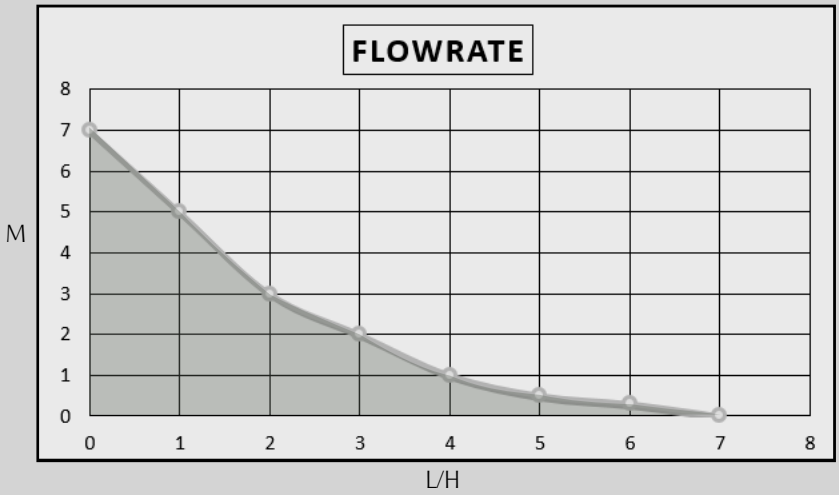

Benefits

20.2 dBA

Very silent pump, suitable for an installation in any room.

Compact tank pump

The SUNNY FLOWATCH® DUO offers the best tank capacity/pump size of the market.

IPX4 protection

Protected against water splashes.

Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.

Mounting brackets

Thanks to its mounting brackets (and screws and rawlplugs supplied), pump can be easily fixed to the wall.

Inlet adapter included

This adapter allows condensate to enter the pump via tubes of different diameters.

1.8L TANK PUMP

1.8L low profile tank pump

Ref: PC3208

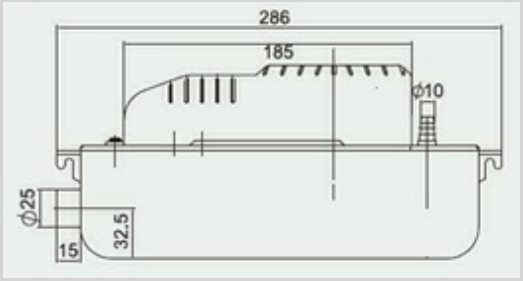

Plug & Play

Technical Specification

Max Lift	max 6m
Discharge Size	max 320L/H
PSI	8.7 psi
Watts	20W
IP Rating	IPX4
Amps	0.18 (230V/50Hz) 0.39A (110V/60Hz)
Volts	100-230V
Hz	50-60Hz
High Level Alarm	Yes
Product Weight (Empty)	0.91kg
Power Cable Length	1.3m
Alarm Cable Length	1.3m
On Level	45mm
Off Level	30mm
Noise Level dBa	28dB(A)
Tank Capacitiy	1.8L

1.8L HIGH LIFT TANK PUMP

1.8L Tank Pump 12m Head

Ref: P580

Plug & Play

Technical Specification

Max Flow	580L/hr
Discharge Head	12m
Watts	90W
Amps	0.18A (230V/50Hz)
Volts	230V
Hz	50Hz
High Level Arm	Yes
Power Cable	1m Plug & Play
Noise Level dBa	60dB(A) at 1m
Tank Capacity	1.8L
Hose Connection	1/4" / 3/8"

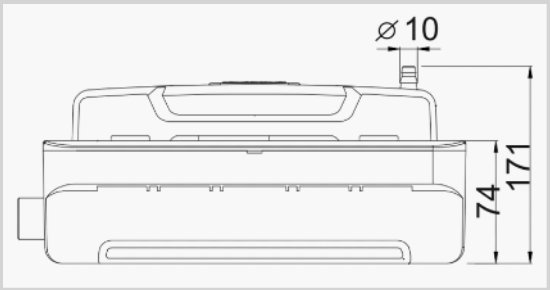

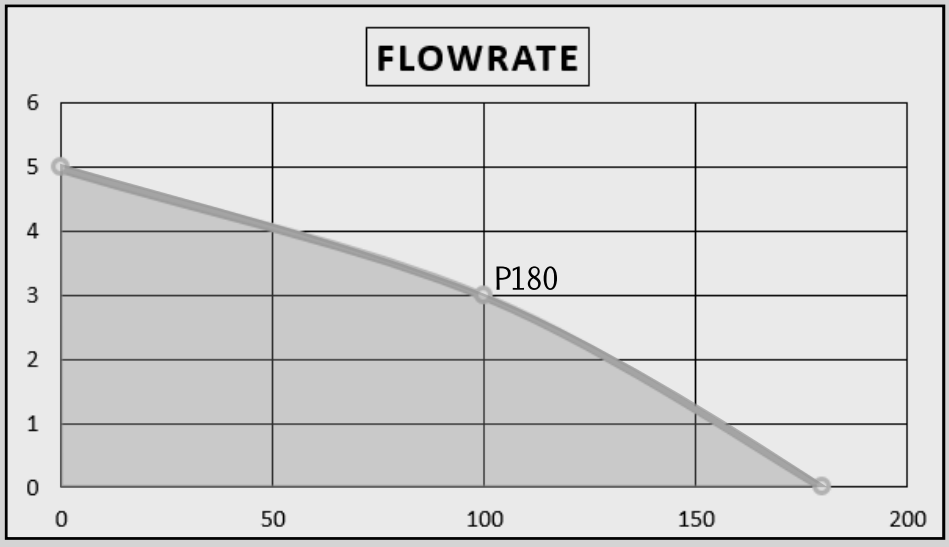

DAIRY CABINET PUMP

Ref: P120S

Product Description

The P120S is specially designed to handle condensate from supermarket refrigerated display cabinets, it is extremely easy to install and maintain.

The compact design of the pump facilitates installation under low-slung display cabinets and it remove water during the defrost cycle.

Including a easy clean stainless tank which can handle the 70 degrees hot water, non return valve 2inlets for optional(top or side). Effectively pumps away defrost water and filters debris

n

Technical Specification

Model	P120S Dairy Cabinet Pump
Tank Capacitiy	3.0 ltr
Sound Level at 1mtr	40-68 dB(A)
Power consumption	30W
Voltage	230V-/50-60Hz
Discharge head	30m
Flowrate	380 L/ph
Dimensions	H 70 x 119 x L 463 x W 286mm
Water Temp	75°C
Case	Stainless Steel

Braided Hose

Commonly used in air, water and liquid transfer applications, braided hoses are a popular choice due to their increased durability, kink resistance and pressure ratings over un-braided variants.

	I/D	O/D	Pressure in Working bar	Pressure in bar burst	Min bend rad	Min temp	Max temp
1/4” X 30m Clear Braided	6m	10m	7mm	2	30°	-15°C	+60°C
1/4” X 30m Black Braided	6mm	10mm	7mm	21	30°	-15°C	+60°C
3/8” X 30m Clear Braided	10mm	14mm	8mm	24	30°	-15°C	+60°C
3/8” X 30m Black Braided	10mm	14mm	8mm	24	30°	-15°C	+60°C
1/2” X 30m Clear Braided	12mm	16mm	6mm	18	30°	-15°C	+60°C

The Perfect Partnership

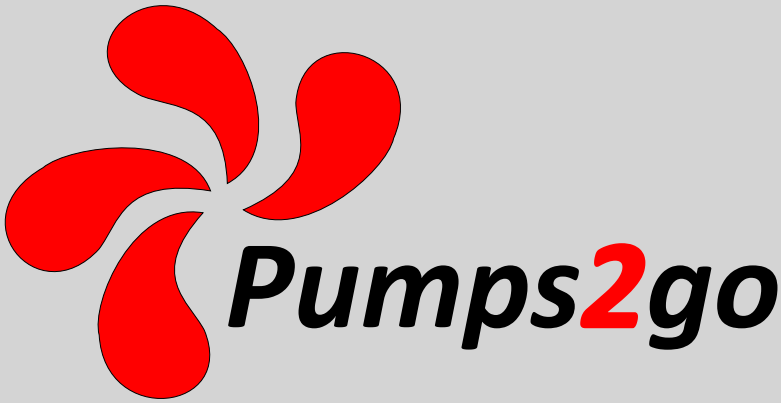

SICCOM

WIPCOOL®

Pumps2go Ltd, Units 5-6 Grain Warehouse, Derby Street, Burton-on-trent, DE14 2JJ

+44 (0)1283 512513 info@pumps2go.co.uk www.pumps2go.co.uk